Aurora™ Gate Arm Light

Aurora Gate Arm Light
Features

- Most cost-efficient LED gate arm light available in the market
- Brightest LED gate arm light available in the market (Each unit contains 36 ultra bright LED's)
- LED viewing angle of 30 degree (Most LEDs in the market have 15 degree viewing)
- Exceeds the AREMA recommended 70 degree beam spread
- Tested for over 200,000 operations without a single LED failure
- Can be used with highway crossing systems of any make and model

Aurora Gate Arm Light – EZ
Features

- Complete installation in ten minutes with one tool
- Complete kit with "PLUG–IN" connectors and coil cords
- Brightest LED gate arm light available in the market (Each unit contains 36 super bright LED's)
- LED viewing angle of 30 degree (Most LEDs in the market have 15 degree viewing)
- Exceeds the AREMA recommended 70 degree beam spread
- Tested for over 200,000 operations without a single LED failure
- Can be used with highway crossing systems of any make and model

OPERATING SPECIFICATIONS

Parameter	Range
Operating Voltage Range	8.5 V AC/DC – 12 V AC/DC
Minimum Forward Current	10 mA
Recommended Operating Voltage	10 VDC
Typical Max. Forward Current Draw (@10VDC)	.35 A
Typical Max. Power Consumption (@10VDC per gate light)	3.5 W
Dominant Wavelength	629 nm (RED)

ALSTOM

PERFORMANCE STANDARDS

Parameter	Standard
Vibration (X, Y and Z axis)	• 2001 AREMA Standard • MIL-STD 810F
Operating Temperature	–40°C to 70°C
IP Rating	IP65
Electronic Noise	Meets AREMA Standards
Storage Temperature	–40°C to 85°C

GATE ARM LIGHT – EZ SIGNAL KIT

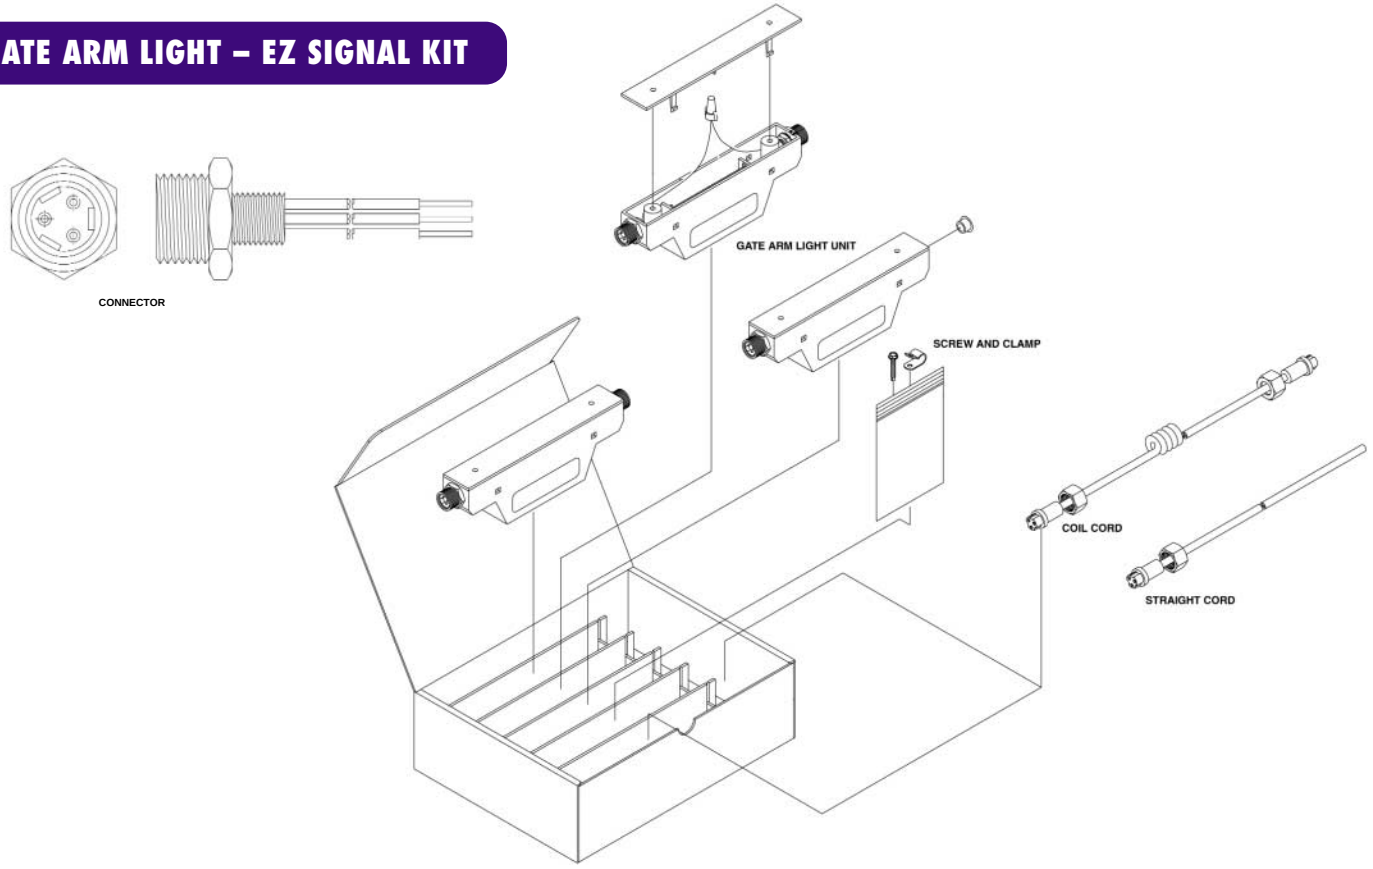

ORDERING INFORMATION

Drawing Number	Product Name	Description
59649-201-01	Aurora Gate Arm Light	Set of three Ultra Bright Gate Arm lights with installation hardware
59649-203-01	Aurora Gate Arm Light – EZ	Set of three Ultra Bright Gate Arm Lights with quick connect coil cords and hardware

ALSTOM

ALSTOM Signaling • 1025 John Street • Rochester, NY 14602 • Tel: (800) 717-4477 • Fax: (585) 274-8777 • www.alstomsignalingsolutions.com

© 2003 ALSTOM, the logo ALSTOM and their frameworks are trademarks and service trademark applications of ALSTOM. The other names, registered or not, are the property of their respective companies. All information is given for indication purpose only and is subject to change without notice.